


TT170



Do you want an event tent that is wider than 10 metres? Then the TT170 is a good option. This heavier tent type can be ordered in 10, 12.5 and 15 metres free span. The TT170 is easy to build without a forklift or aerial platform.

This tent type is supplied with white PVC tarpaulins as standard, but you can also choose transparent or coloured PVC tarpaulins. Want a more luxurious look? Choose hard or glass walls. Discuss all options with our specialists!

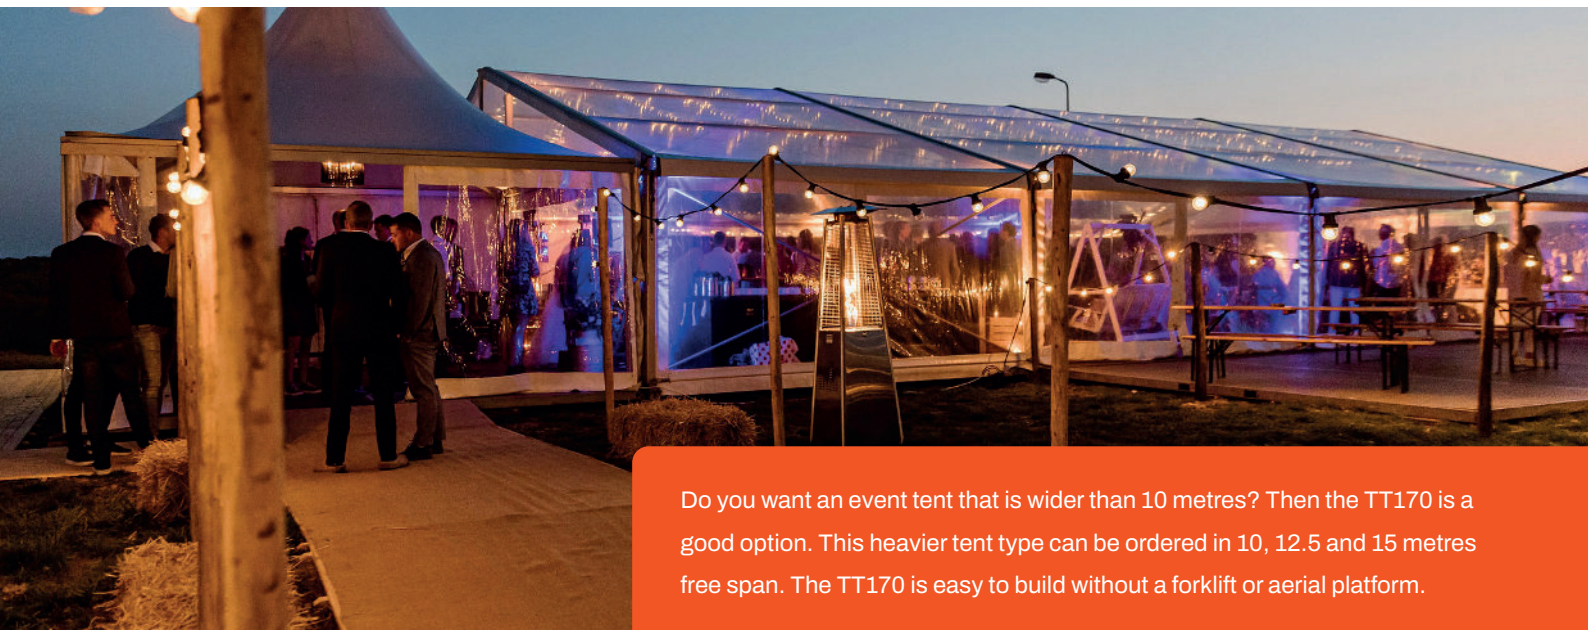

This tent type is **widely used** for:



Fairs and conferences



Events



Showrooms



Hospitality



Retail



VIP rooms




Festivals



Weddings


TT170

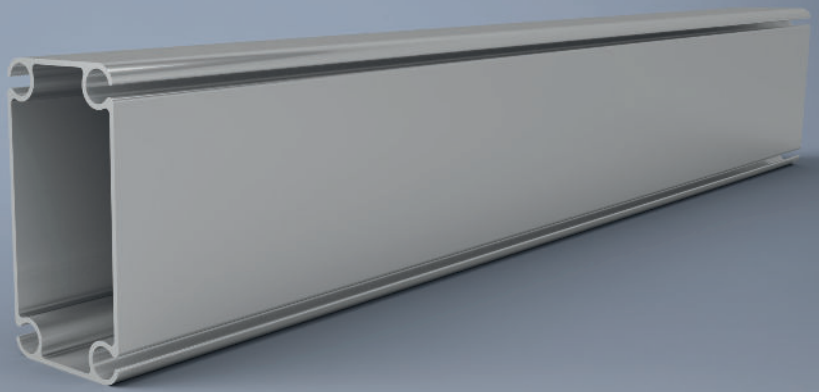


General specifications

Width:	10.00 m 12.50 m 15.00 m
Length:	Unlimited extension of 5.00 m
Side height:	2.30 m 3.00 m
Ridge height:	3.97 m - 5.39 m
Roof covering:	Translucent PVC canvas Opaque (block-out) PVC canvas
Roof construction:	Ridge construction Curved roof construction <i>(not possible for 12.5 m wide)</i>
Gable covering:	Translucent PVC canvas Opaque (block-out) PVC canvas
Profile dimension:	170 x 88 mm
Roof pitch:	18 degrees
Maximum wind load:	100 km/h
Maximum snow load:	Upon request
Aluminium :	AL6082 AL6005 Natural anodised Highly abrasion-resistant High corrosion resistance


Additional options:

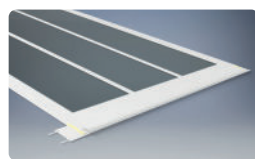

Transparent PVC canvas

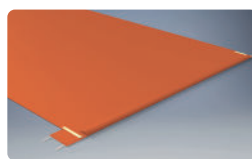

Coloured PVC canvas

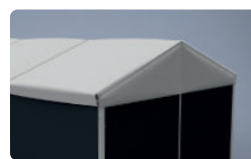

Insulated roofs




Solid wall panels




Glass wall panels



Sandwich wall panels

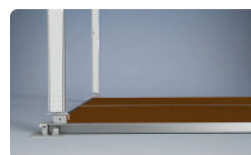

Heavy-duty flooring

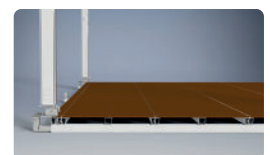

Cassette flooring



Transport rack




Single wicket door



Double wicket door glass




Connecting gutter between alu halls

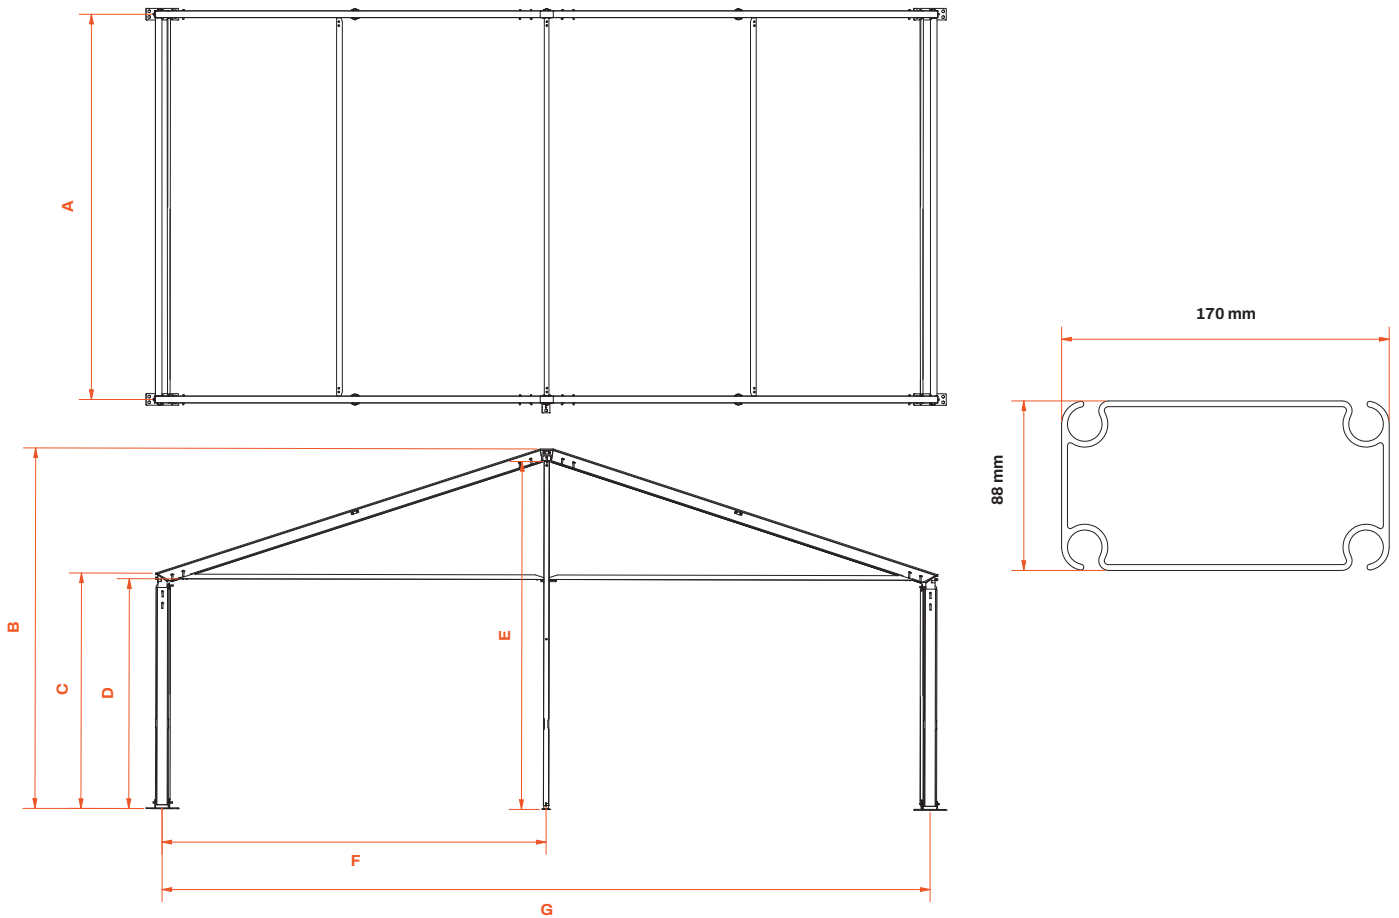

TT170 series | 10 metres | Ridge construction

	10.00 m span 2.30 m side height	10.00 m span 3.00 m side height
A Segment length c/c	5,000 mm	5,000 mm
B Ridge height	3,966 mm	4,678 mm
C Side height	2,343 mm	3,055 mm
D Passage height	2,093 mm	2,805 mm
E Facade height	3,801 mm	4,513 mm
F Columns c/c	4,983 mm	4,983 mm
G Span c/c	9,966 mm	9,966 mm




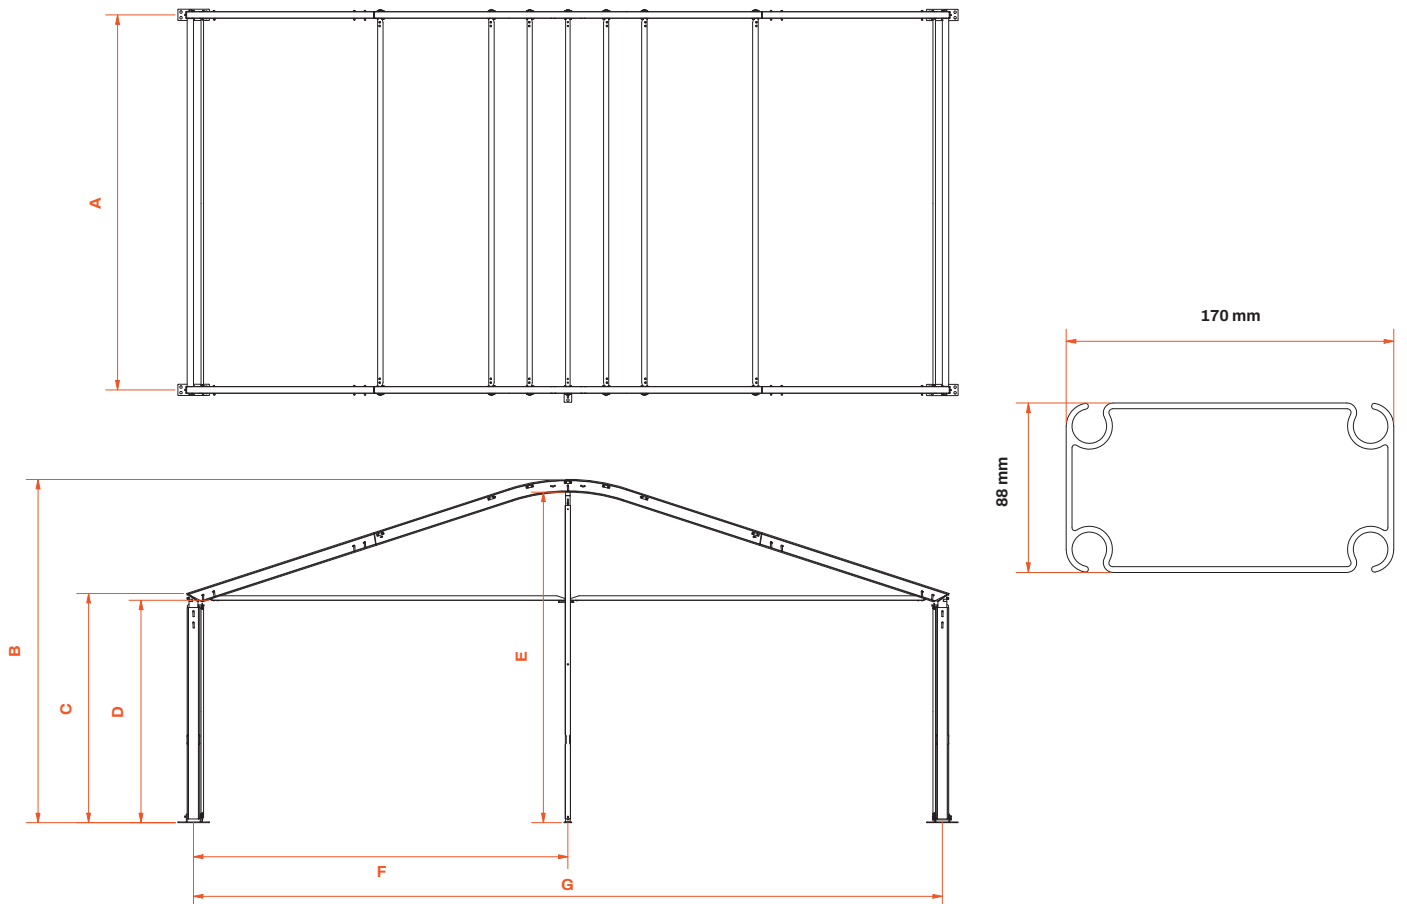

TT170 series | 10 metres | Curved roof construction

	10.00 m span 2.30 m side height	10.00 m span 3.00 m side height
A Segment length c/c	5,000 mm	5,000 mm
B Ridge height	3,874 mm	4,586 mm
C Side height	2,343 mm	3,055 mm
D Passage height	2,093 mm	2,805 mm
E Facade height	3,709 mm	4,421 mm
F Columns c/c	4,983 mm	4,983 mm
G Span c/c	9,966 mm	9,966 mm




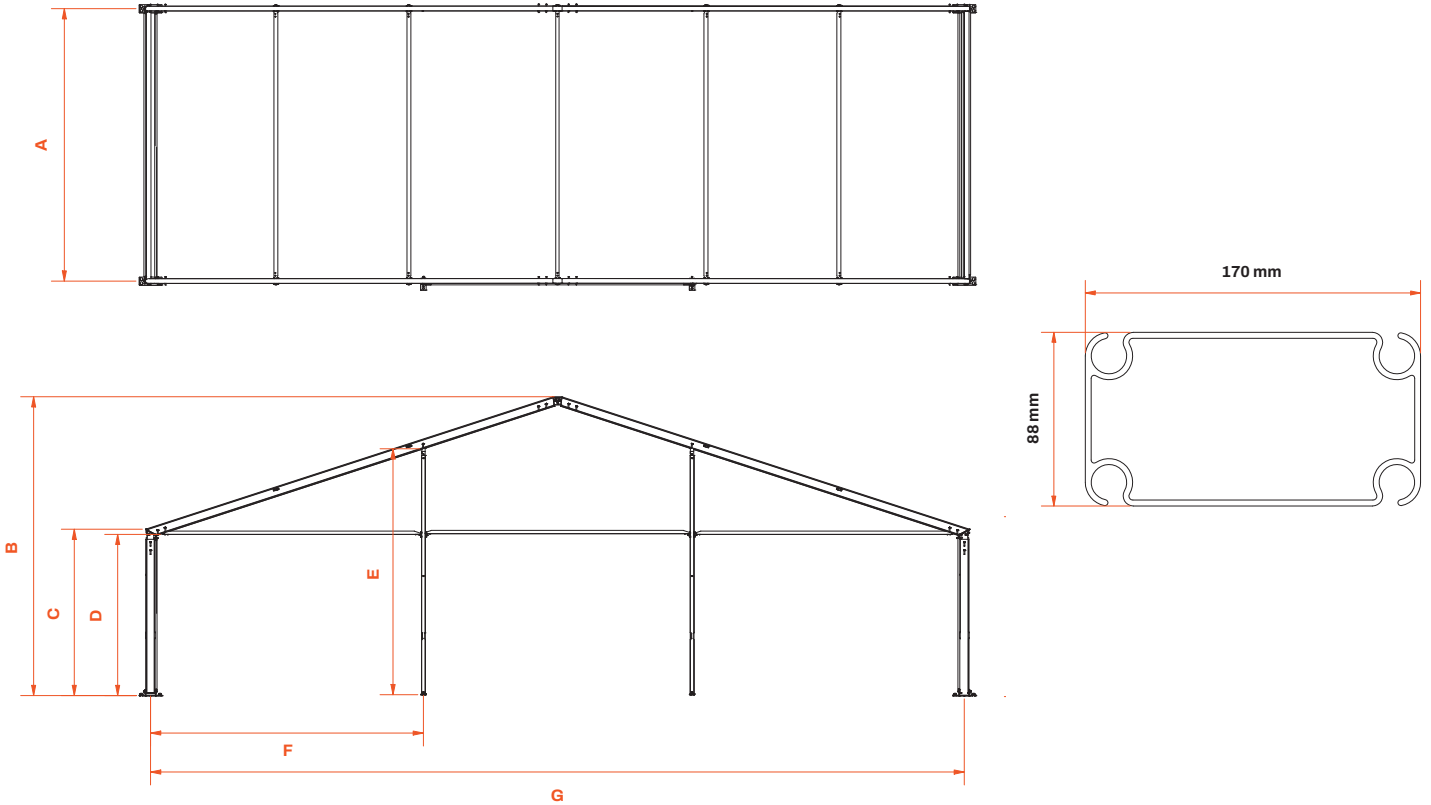

TT170 series | 12.5 and 15 metres | Ridge construction

	12.50 m de portée 2.30 m de hauteur latérale	12.50 m de portée 3.00 m de hauteur latérale	15.00 m de portée 2.30 m de hauteur latérale	15.00 m de portée 3.00 m de hauteur latérale
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm	5,000 mm
B Ridge height	4,368 mm	5,079 mm	4,772 mm	5,484 mm
C Side height	2,343 mm	3,055 mm	2,343 mm	3,055 mm
D Passage height	2,093 mm	2,805 mm	2,093 mm	2,805 mm
E Facade height	3,819 mm	4,531 mm	3,819 mm	4,531 mm
F Columns c/c	4,999 mm	4,999 mm	4,999 mm	4,999 mm
G Span c/c	12,451 mm	12,451 mm	14,939 mm	14,939 mm



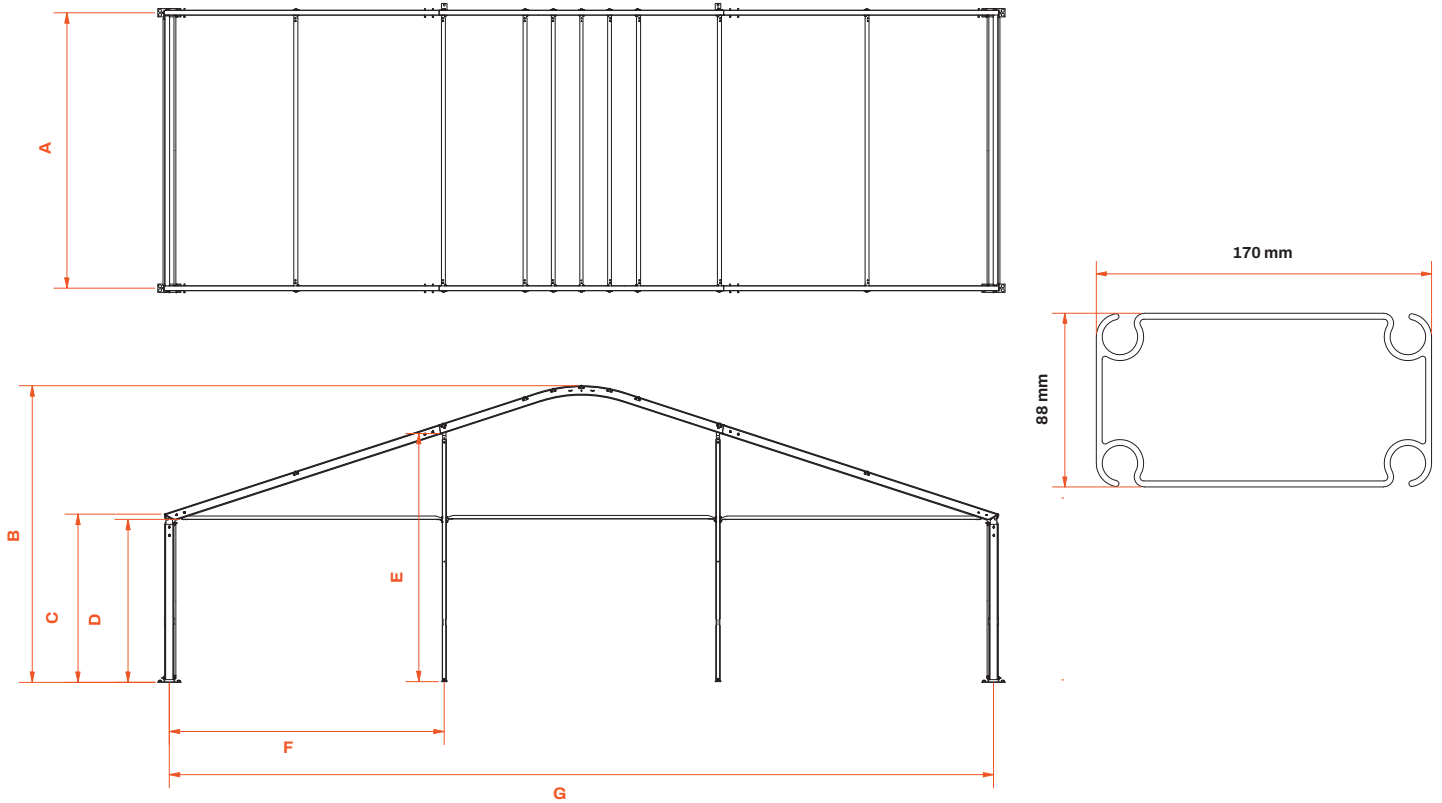

TT170 series | 15 metres | Curved roof construction

	15.00 m de portée 2.30 m de hauteur latérale	15.00 m de portée 3.00 m de hauteur latérale
A Segment length c/c	5,000 mm	5,000 mm
B Ridge height	4,680 mm	5,392 mm
C Side height	2,343 mm	3,055 mm
D Passage height	2,093 mm	2,805 mm
E Facade height	3,819 mm	4,531 mm
F Columns c/c	4,999 mm	4,999 mm
G Span c/c	14,939 mm	14,939 mm

