



The TT225 is perfect as a larger event tent. This tent type has several extension options, such as hard walls, an insulated roof and several types of doors. This tent has a side height of up to 4.5 metres.

Its unique dovetail joints make it easy to build with a forklift and winch. Efficient, large and strong: we understand why our customers use the TT225 for the bigger jobs.



This tent type is **widely used** for:



Fairs and
conferences



Events



Showrooms



Hospitality



Retail




VIP rooms



Festivals




Weddings

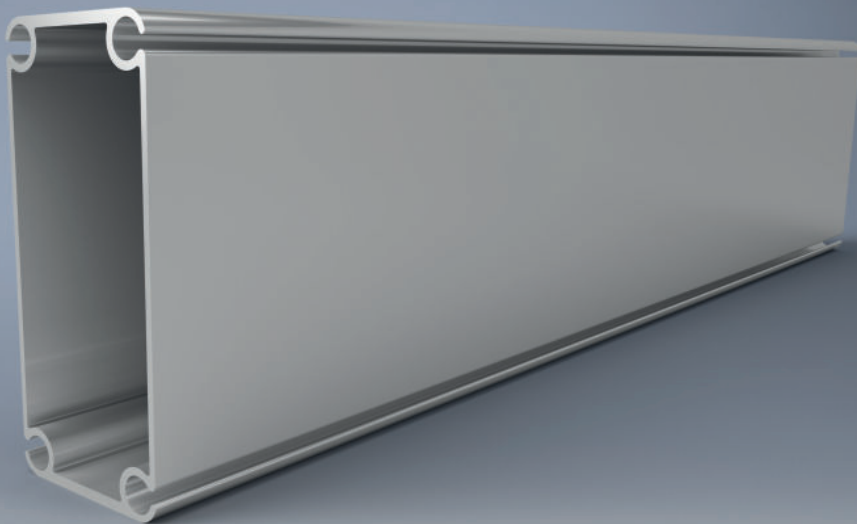


General specifications

Width:	10.00 m 15.00 m 20.00 m 25.00 m
Length:	Unlimited extension of 5.00 m
Side height:	2.30 m 3.00 m 4.50 m
Ridge height:	4.21 m - 8.67 m
Roof covering:	Translucent PVC canvas Opaque (block-out) PVC canvas
Roof construction:	Ridge construction Curved roof construction
Gable covering:	Translucent PVC canvas Opaque (block-out) PVC canvas
Profile dimension:	225 x 101 mm
Roof pitch:	18 degrees
Maximum wind load:	100 km/h
Maximum snow load:	Upon request
Aluminium :	AL6082 AL6005 Natural anodised Highly abrasion-resistant High corrosion resistance

Additional options:

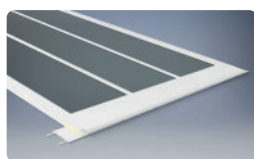

Transparent PVC canvas

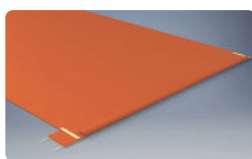

Coloured PVC canvas



Solid wall panels



Glass wall panels



Roller shutter door




Sandwich wall panels



Manual sliding door



Heavy-duty flooring

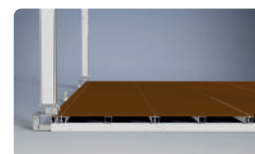

Cassette flooring



Transport rack



Single wicket door




Double wicket door glass



Overhead door




Connecting gutter between alu halls

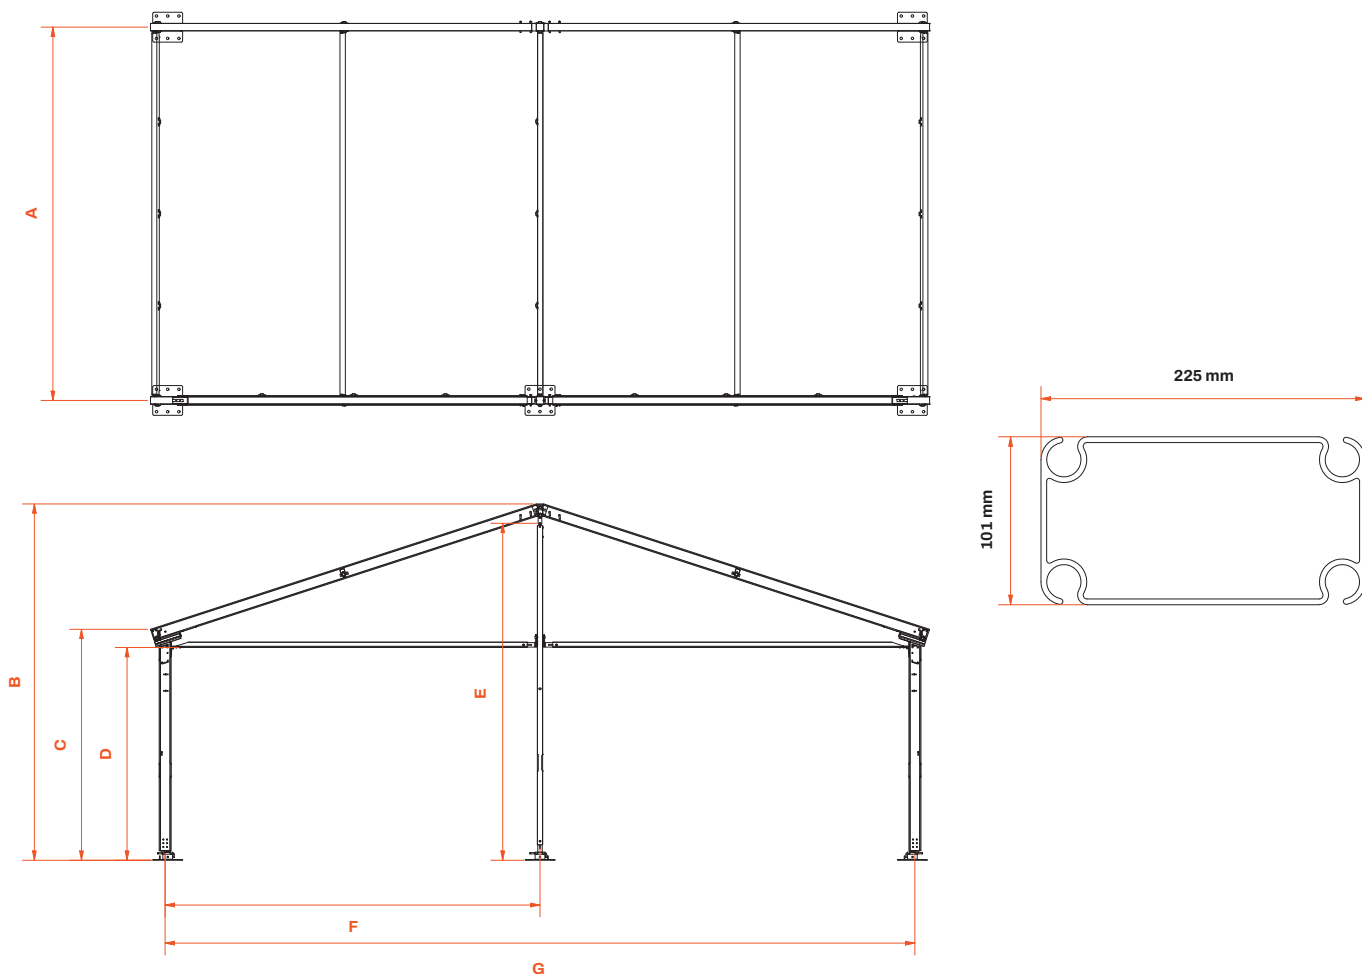
TT225 series | 10 metres | Ridge construction


	10.00 m span 2.30 m side height	10.00 m span 3.00 m side height	10.00 m span 4.50 m side height
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm
B Ridge height	4,206 mm	4,776 mm	6,236 mm
C Side height	2,527 mm	3,097 mm	4,557 mm
D Passage height	2,127 mm	2,697 mm	4,157 mm
E Facade height	3,960 mm	4,530 mm	5,990 mm
F Columns c/c	4,970 mm	4,970 mm	4,970 mm
G Span c/c	9,942 mm	9,942 mm	9,942 mm

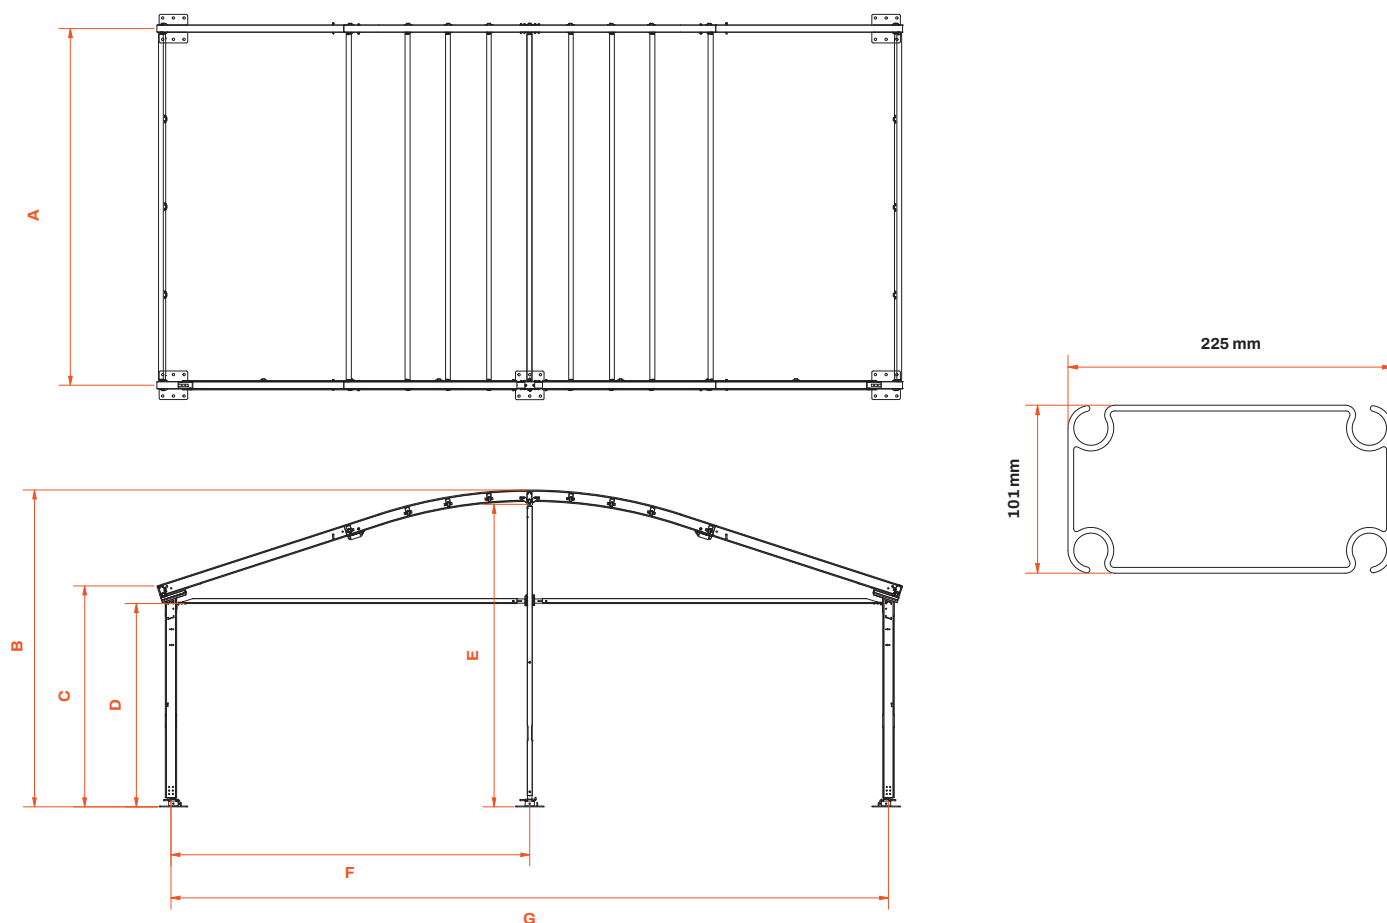


TT225 series | 10 metres | Curved roof construction


	10.00 m span 2.30 m side height	10.00 m span 3.00 m side height	10.00 m span 4.50 m side height
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm
B Ridge height	3,871 mm	4,441 mm	5,901 mm
C Side height	2,527 mm	3,097 mm	4,557 mm
D Passage height	2,127 mm	2,697 mm	4,157 mm
E Facade height	3,625 mm	4,195 mm	5,655 mm
F Columns c/c	4,970 mm	4,970 mm	4,970 mm
G Span c/c	9,942 mm	9,942 mm	9,942 mm

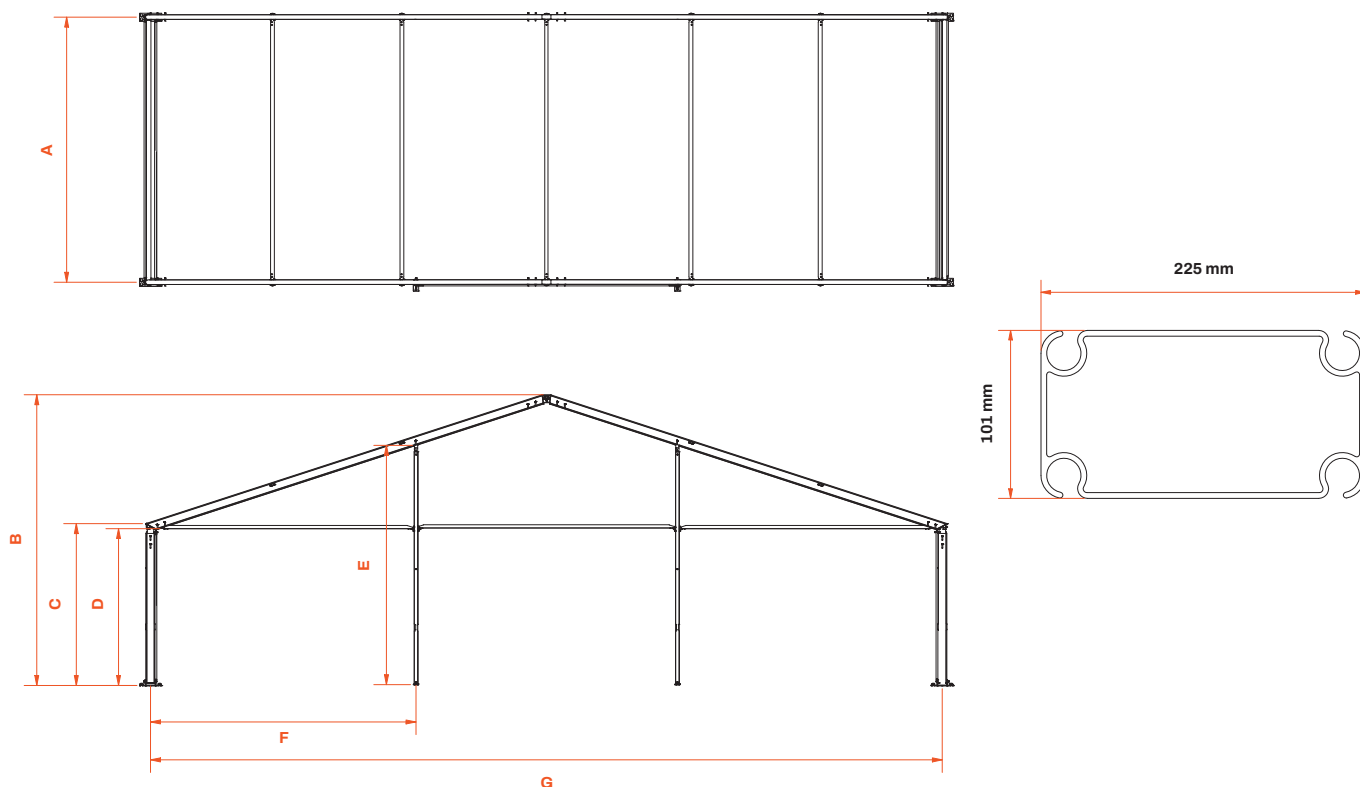


TT225 series | 15 metres | Ridge construction

	15.00 m span 2.30 m side height	15.00 m span 3.00 m side height	15.00 m span 4.50 m side height
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm
B Ridge height	5,017 mm	5,587 mm	7,047 mm
C Side height	2,527 mm	3,097 mm	4,557 mm
D Passage height	2,127 mm	2,697 mm	4,157 mm
E Facade height	3,959 mm	4,529 mm	5,989 mm
F Columns c/c	5,018 mm	5,018 mm	5,018 mm
G Span c/c	14,935 mm	14,935 mm	14,935 mm




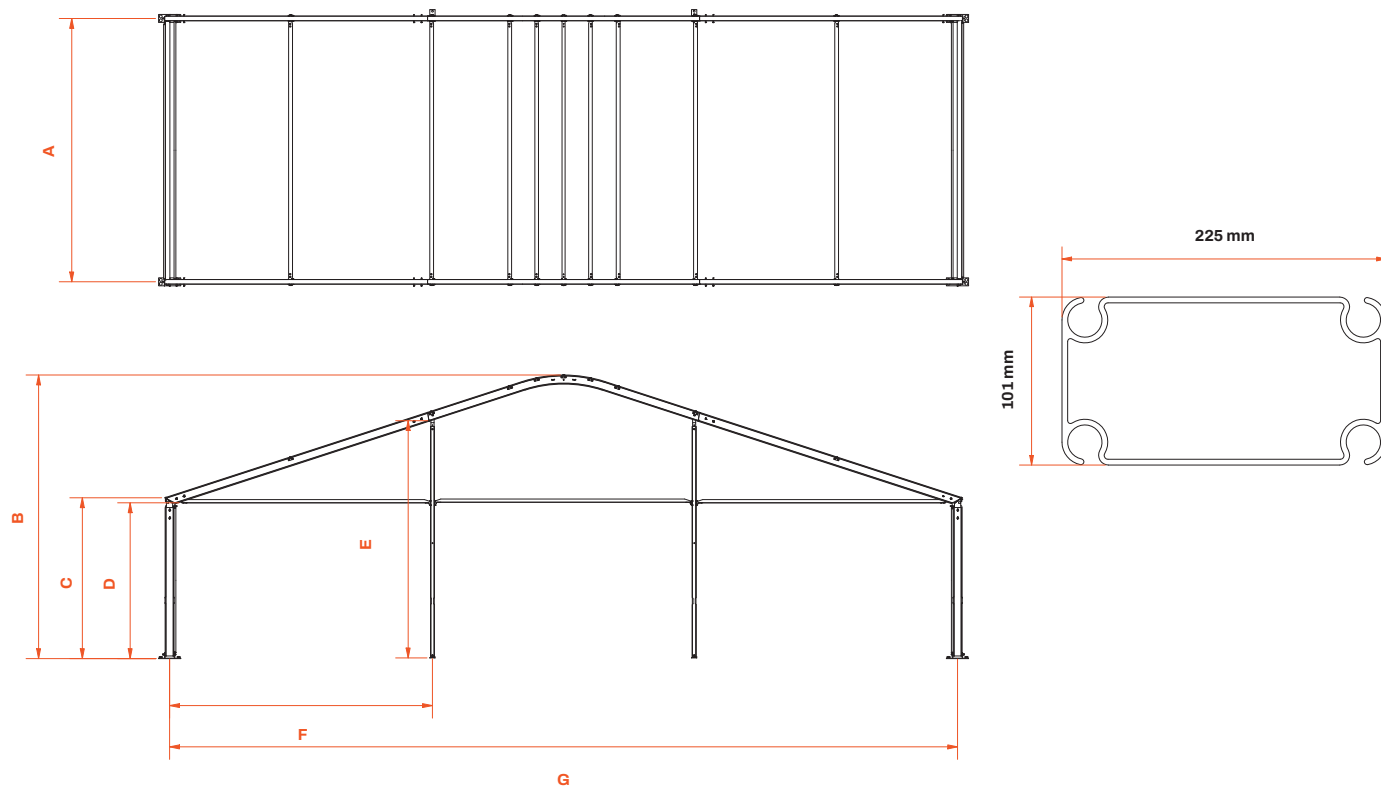

TT225 series | 15 metres | Curved roof construction


	15.00 m span 2.30 m side height	15.00 m span 3.00 m side height	15.00 m span 4.50 m side height
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm
B Ridge height	4,682 mm	5,252 mm	6,712 mm
C Side height	2,527 mm	3,097 mm	4,557 mm
D Passage height	2,127 mm	2,697 mm	4,157 mm
E Facade height	3,959 mm	4,529 mm	5,989 mm
F Columns c/c	5,018 mm	5,018 mm	5,018 mm
G Span c/c	14,935 mm	14,935 mm	14,935 mm

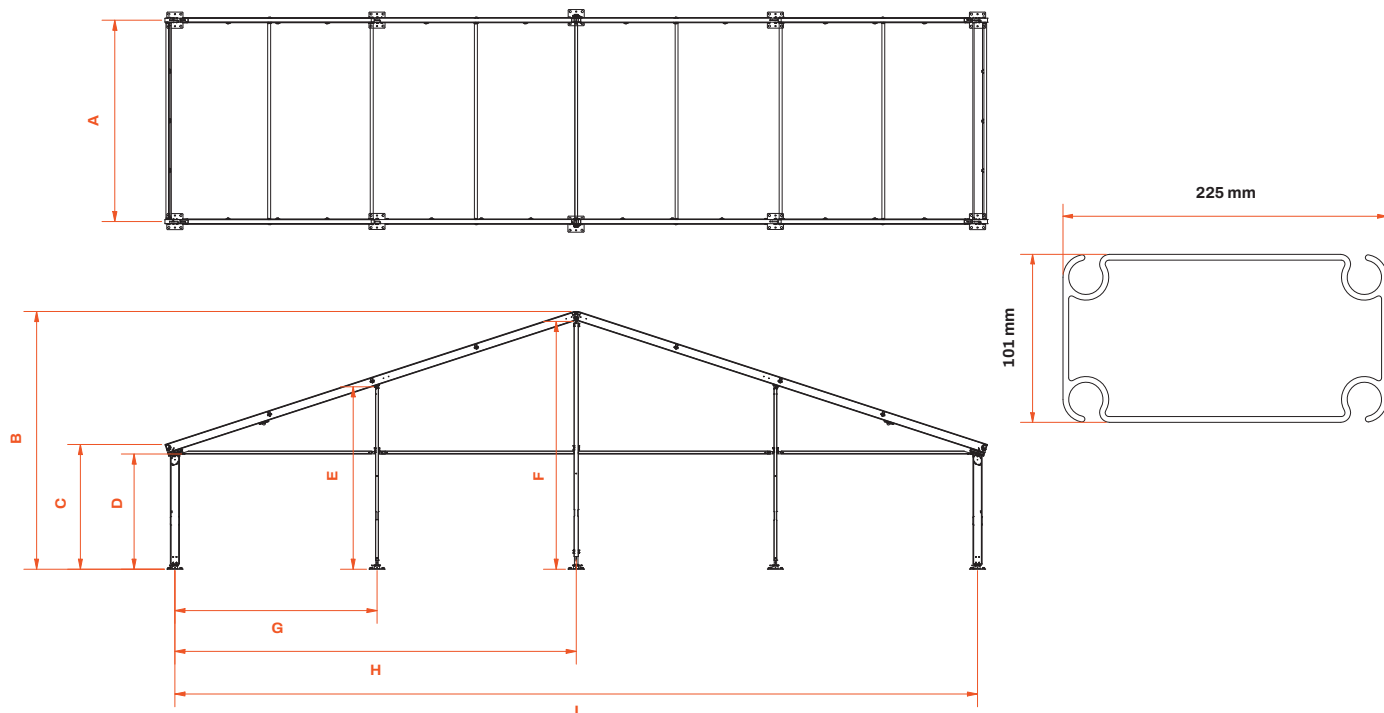


TT225 series | 20 metres | Ridge construction


	20.00 m span 2.30 m side height	20.00 m span 3.00 m side height	20.00 m span 4.50 m side height
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm
B Ridge height	5,828 mm	6,398 mm	7,858 mm
C Side height	2,527 mm	3,097 mm	4,557 mm
D Passage height	2,127 mm	2,697 mm	4,157 mm
E Facade height 1	3,959 mm	4,529 mm	5,989 mm
F Facade height 2	5,580 mm	6,150 mm	7,610 mm
G Column 1 c/c	5,018 mm	5,018 mm	5,018 mm
H Column 2 c/c	9,963 mm	9,963 mm	9,963 mm
I Span c/c	19,928 mm	19,928 mm	19,928 mm

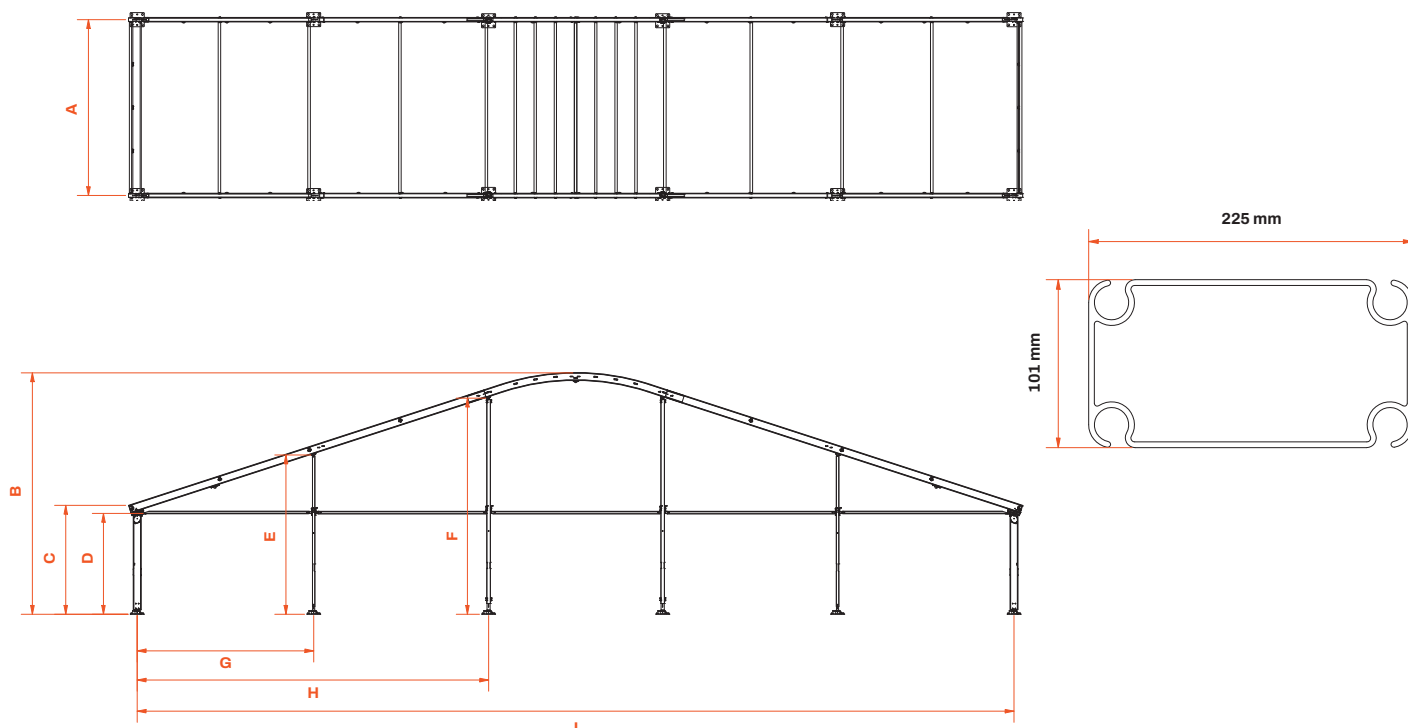

**TT225 series | 20 metres | Curved roof construction**


	20.00 m span 2.30 m side height	20.00 m span 3.00 m side height	20.00 m span 4.50 m side height
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm
B Ridge height	5,493 mm	6,063 mm	7,523 mm
C Side height	2,527 mm	3,097 mm	4,557 mm
D Passage height	2,127 mm	2,697 mm	4,157 mm
E Facade height 1	3,959 mm	4,529 mm	5,989 mm
F Facade height 2	5,245 mm	5,815 mm	7,275 mm
G Column 1 c/c	5,018 mm	5,018 mm	5,018 mm
H Column 2 c/c	9,963 mm	9,963 mm	9,963 mm
I Span c/c	19,928 mm	19,928 mm	19,928 mm

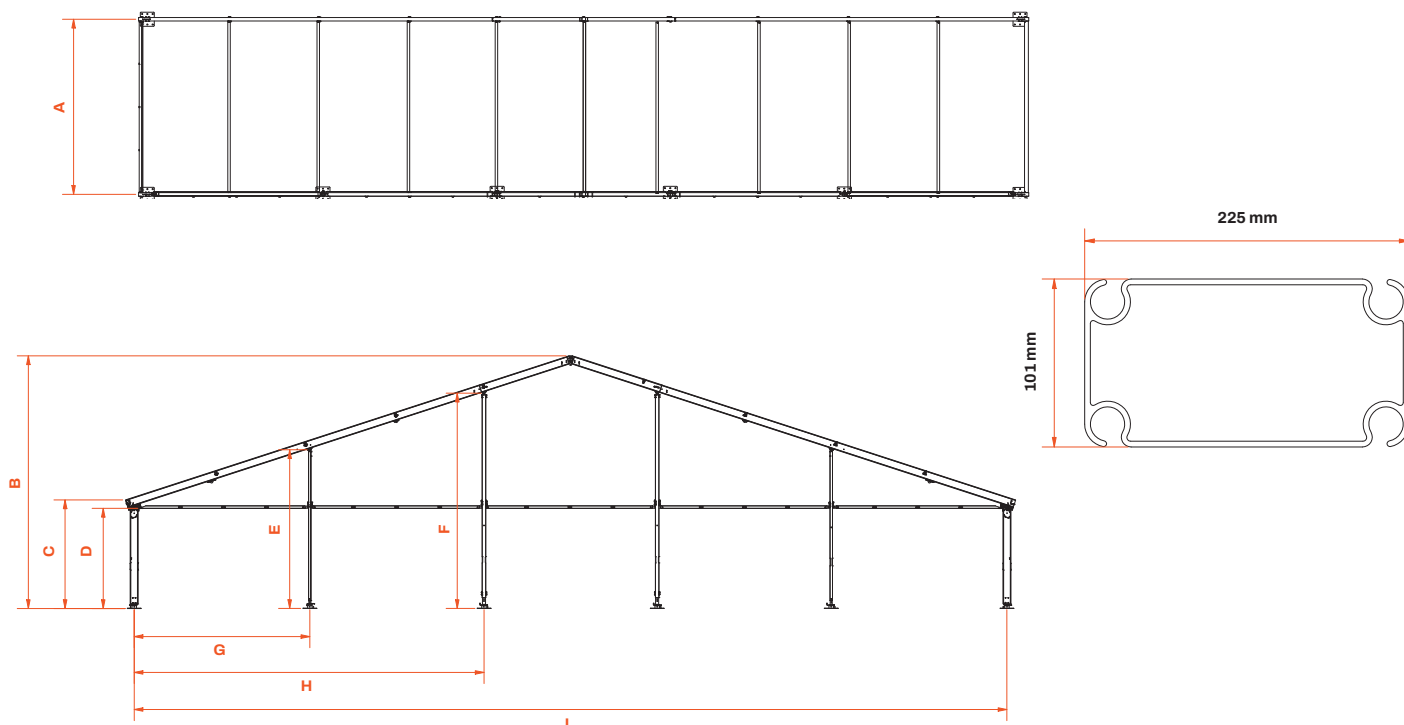


TT225 series | 25 metres | Ridge construction

	25.00 m span 2.30 m side height	25.00 m span 3.00 m side height	25.00 m span 4.50 m side height
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm
B Ridge height	6,640 mm	7,210 mm	8,670 mm
C Side height	2,527 mm	3,097 mm	4,557 mm
D Passage height	2,127 mm	2,697 mm	4,157 mm
E Facade height 1	3,959 mm	4,529 mm	5,989 mm
F Facade height 2	5,574 mm	6,144 mm	7,604 mm
G Column 1 c/c	5,018 mm	5,018 mm	5,018 mm
H Column 2 c/c	9,987 mm	9,987 mm	9,987 mm
I Span c/c	24,921 mm	24,921 mm	24,921 mm

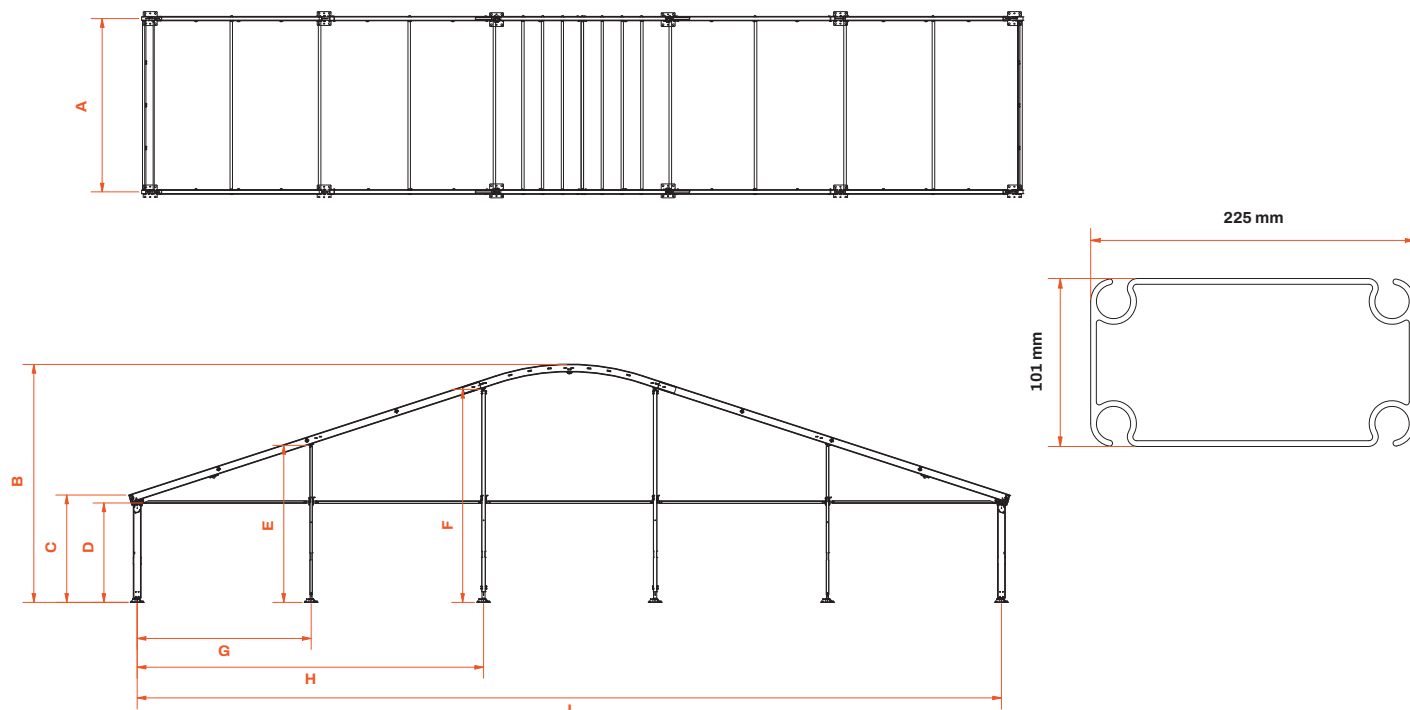

**TT225 serie | 25 metres | Curved roof construction**

	25.00 m span 2.30 m side height	25.00 m span 3.00 m side height	25.00 m span 4.50 m side height
A Segment length c/c	5,000 mm	5,000 mm	5,000 mm
B Ridge height	6,305 mm	6,875 mm	8,335 mm
C Side height	2,527 mm	3,097 mm	4,557 mm
D Passage height	2,127 mm	2,697 mm	4,157 mm
E Facade height 1	3,959 mm	4,529 mm	5,989 mm
F Facade height 2	5,574 mm	6,144 mm	7,604 mm
G Column 1 c/c	5,018 mm	5,018 mm	5,018 mm
H Column 2 c/c	9,987 mm	9,987 mm	9,987 mm
I Span c/c	24,921 mm	24,921 mm	24,921 mm

